


IMMERSION™

LED Refrigerated Display Lighting


Horizontal Cases
RH20 Series




Canopy LED Light

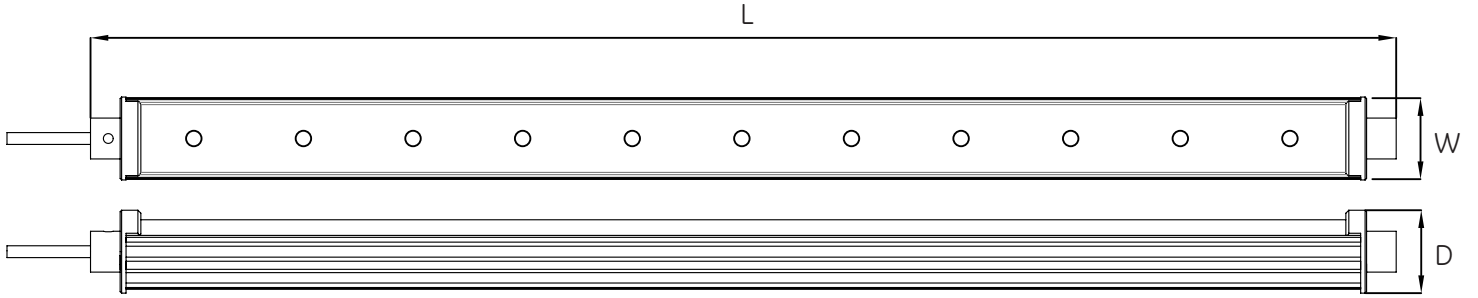


Undershelf LED Light

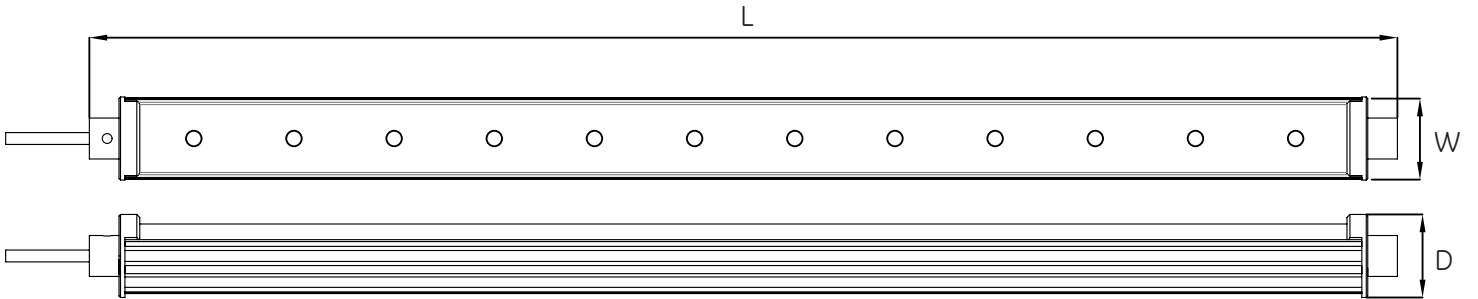

Accessories

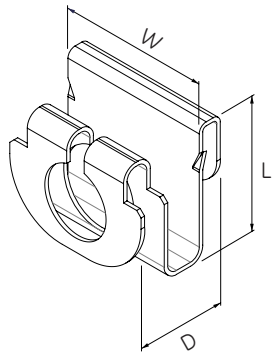

U Clip

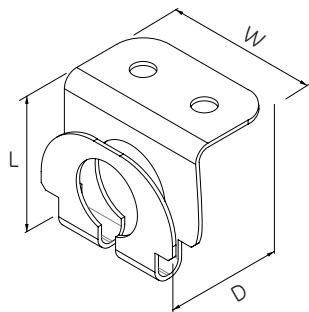

L Clip



LED Driver

Immersion RH20 Series

Product Code	Description	Package Quantity	Item	PERFORMANCE DATA						DIMENSIONAL DATA			
				Color Temp (K)*	Light Output (Lumens)**	Life (Hours)	CRI (Typical)	Power (Watts)***	Length (L)	Width (W)	Depth (D)		
5000K	65486	GE-MT202450CANSY	1	24" LED Light - Canopy	5000	767	50,000	75	10.8	(inch) (mm)	22.8 580	1.1 28	1.1 28
	65517	GE-MT202450USLSY	1	24" LED Light - Undershelf	5000	282	50,000	75	3.4	(inch) (mm)	23.2 589	1.1 28	1.1 28
	65488	GE-MT203650CANSY	1	36" LED Light - Canopy	5000	1151	50,000	75	18.9	(inch) (mm)	34.8 884	1.1 28	1.1 28
	65520	GE-MT203650USLSY	1	36" LED Light - Undershelf	5000	423	50,000	75	5.4	(inch) (mm)	35.2 893	1.1 28	1.1 28
	65490	GE-MT204850CANSY	1	48" LED Light - Canopy	5000	1535	50,000	75	25.3	(inch) (mm)	45.8 1164	1.1 28	1.1 28
	65522	GE-MT204850USLSY	1	48" LED Light - Undershelf	5000	564	50,000	75	6.6	(inch) (mm)	46.2 1173	1.1 28	1.1 28
4000K	65480	GE-MT202440CANSY	1	24" LED Light - Canopy	4000	680	50,000	80	10.8	(inch) (mm)	22.8 580	1.1 28	1.1 28
	65508	GE-MT202440USLSY	1	24" LED Light - Undershelf	4000	279	50,000	80	3.4	(inch) (mm)	23.2 589	1.1 28	1.1 28
	65482	GE-MT203640CANSY	1	36" LED Light - Canopy	4000	1020	50,000	80	18.9	(inch) (mm)	34.8 884	1.1 28	1.1 28
	65511	GE-MT203640USLSY	1	36" LED Light - Undershelf	4000	418	50,000	80	5.4	(inch) (mm)	35.2 893	1.1 28	1.1 28
	65484	GE-MT204840CANSY	1	48" LED Light - Canopy	4000	1360	50,000	80	25.3	(inch) (mm)	45.8 1164	1.1 28	1.1 28
	65515	GE-MT204840USLSY	1	48" LED Light - Undershelf	4000	558	50,000	80	6.6	(inch) (mm)	46.2 1173	1.1 28	1.1 28
3000K	65468	GE-MT202430CANSY	1	24" LED Light - Canopy	3000	585	50,000	80	10.8	(inch) (mm)	22.8 580	1.1 28	1.1 28
	65492	GE-MT202430USLSY	1	24" LED Light - Undershelf	3000	233	50,000	80	3.4	(inch) (mm)	23.2 589	1.1 28	1.1 28
	65470	GE-MT203630CANSY	1	36" LED Light - Canopy	3000	878	50,000	80	18.9	(inch) (mm)	34.8 884	1.1 28	1.1 28
	65494	GE-MT203630USLSY	1	36" LED Light - Undershelf	3000	349	50,000	80	5.4	(inch) (mm)	35.2 893	1.1 28	1.1 28
	65472	GE-MT204830CANSY	1	48" LED Light - Canopy	3000	1171	50,000	80	25.3	(inch) (mm)	45.8 1164	1.1 28	1.1 28
	65496	GE-MT204830USLSY	1	48" LED Light - Undershelf	3000	466	50,000	80	6.6	(inch) (mm)	46.2 1173	1.1 28	1.1 28

*Color temp (CCT) +/- 10%

**Based on typical in-store performance.

***Typical DC Watts

LED Drivers

Product Code	Description	Quantity per Package	Item	DIMENSIONAL DATA			
				Length (L)	Width (W)	Depth (D)	
74915	GE080/G/V24T1-A	1	Constant Voltage LED Driver - 24-80	(inch) (mm)	9.5 240	1.7 43	1.2 30
74916	GE0100/MV/V24T1-A	1	Constant Voltage LED Driver - 24-100U	(inch) (mm)	9.5 240	1.7 43	1.2 30

Mounting Clips

Product Code	Description	Quantity per Bag	Item	Length (L)	Width (W)	Depth (D)
				(inch) (mm)	(inch) (mm)	(inch) (mm)
79733	GE-MT1000NCM01SY	2	Universal Mounting Clip - L	(inch)	1	0.9
79734	GE-MT1000NCM01SB	36		(mm)	26.3	23.3
79735	GE-MT1000NCM02SY	2	Universal Mounting Clip - U	(inch)	1.1	0.7
79736	GE-MT1000NCM02SB	36		(mm)	26.7	18.1

LED Driver Performance

	74915 GE080/G/V24T1-A			74916 GE0100/M/V24T1-A		
	Min	Typical	Max	Min	Typical	Max
Input Voltage (VAC)	90	100/240	264	108	120/277	305
Input Current (A)			1.1	0.4	0.6	1
Input Line Frequency (Hz)		50/60			50/60	
Output Voltage (V)	23	24	25.6	24.25	25	25.75
Output Power (W)			80			100
Max Output Current (A)			3.3			4.1
Operating Temperature Range (C)	-40	25	60	-40	25	55
Storage Temperature Range (C)	-40	25	85	-40	25	85

Conforms to the following standards:



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This Class [A] RFLD complies with the Canadian standard ICES-005. Ce DEFR de la classe [A] est conforme à la NMB-005 du Canada.



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com

1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. Immersion is a trademark of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2011 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.