

## LED Tube Lights T8/L05G Standard T8 LED tube



Model	Power	Dimension (mm)	LED Quantity (pcs)	Luminous (Frosted lens)	Luminous (Clear Lens)
L05G-600MM	11W	26*588(2FT)	108	1100lm±10%	1210lm±10%
L05G-1200MM	20W	26*1198(4FT)	216	2000m±10%	2200lm±10%
L05G-1500MM	24W	26*1498(5FT)	240	2400lm±10%	2640lm±10%

Operation: Temperature: -20°C to 40°C  
Voltage: AC110V-240V  
Frequency: 50HZ/60HZ  
Power Factor: >0.95  
Power supply Efficiency: >90%


Photometric Specifications  
LED Luminous Efficiency: Up to 100lm/w  
CRL: Ra. >70  
CCT: Warm White 3000k, daylight white 4000k,  
pure white 5500k, cold white 6500k

Mechanical Specifications  
Light distribution: 120°  
Isolate power supply  
Latest lockable rotating end cap  
Clear/Frosted cover is available  
Weight: 588MM/210g, 1198mm/368.2g, 1498mm/443.8g

#### Installation Instructions

NOTE: Before installation, please make sure the power is turned off.

A. When LED tubes are replaced in a standard fluorescent tube batten, the starter must be removed, and replaced by the enclosed fuse.

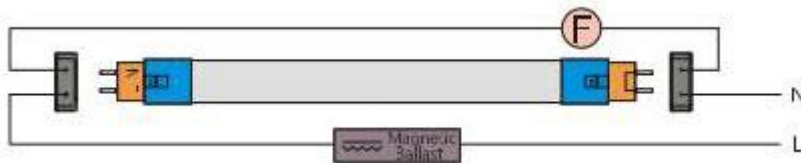

ATTENTION: Only suitable for battens with magnetic ballast, not electronic ballast.

B. Electronic ballast must be by-passed by a registered electrician.

